


Hydraulic Bolt Tensioners



			Load Capacity		Hydraulic Pressure Area		A	B	C A/F	D	
			tonF	KN	in ²	mm ²	mm	mm	mm	imp bolts	metric bolts
SRT 1	1"	M24	28,1	280	2,89	1867	87	117	68	175	175
	1 1/8"							120	72	181	178
SRT 2	1"	M24	46	450	4,65	3001	103	117	75	175	175
		M27						120	80		178
	1 1/8"	M30						120	80	181	184
	1 1/4"	M33						123	84	188	190
	1 3/8"	M36						126	89	195	196
SRT 3	1 1/4"	M33	66,2	660	6,82	4401	118	123	88	190	192
	1 3/8"	M36						126	96	197	198
	1 1/2"	M39						130	96	203	204
	1 5/8"	M48						133	105	209	211
SRT 4	1 1/2"	M39	101,4	1000	10,34	6668	140,5	132	112	211	212
	1 5/8"	M42						135	114	217	218
	1 3/4"	M45						139	118	223	225
	1 7/8"	M48						142	114	230	231
	2"							145	120	236	
SRT 5	2"	M52	150,5	1500	15,5	10003	175,5	148	120	246	248
	2 1/4"	M56						154	138	259	258
		M60						161	138		262
	2 1/2"	M64						161	153	272	273
	2 3/4"	M68						167	156	284	283
SRT 6	2 3/4"	M72	250,9	2500	25,84	16671	219	167	157	294	297
	3"	M76						174	182	307	308
		M80						180	190		312
	3 1/4"	M85						180	190	320	323
	3 1/2"	M90						186	205	332	334

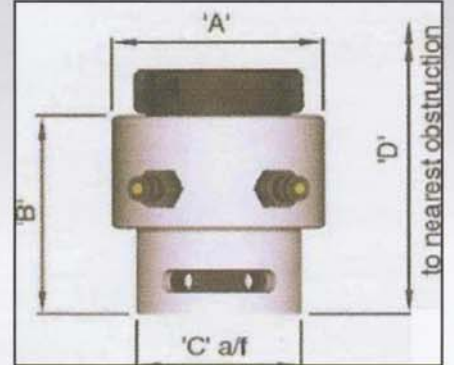

The Netherlands: Pascalstraat 88, 3316 GR, Dordrecht, the Netherlands

T: +31 (0) 78 652 4111 F: +31 (0) 78 652 4112 E: info@patriot-int.com

United Kingdom: Unit 1 Airport Commerce Park, Howe Moss Drive, Dyce, Aberdeen, AB21 0GF, UK

T: +44 (0) 1224 724726 F: +44 (0) 1224 724727 E: info@patriot-int.com

www.patriot-int.com